

## Halland 2 PU

Build up Instructions



See more online: Halland video · Build-up video · 360° pics · Windtest


# **Congratulations!**

We wish you lots of fun with your new Nordisk tent!




Spread out the tent. Slide the poles through the color coded pole sleeves. Ensure all doors



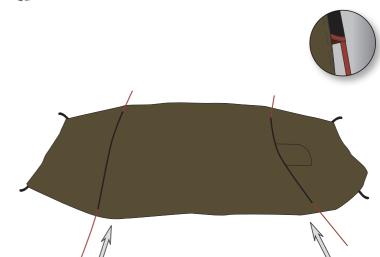


2

Fix the pole ends into the webbing eyelets on the outer tent.

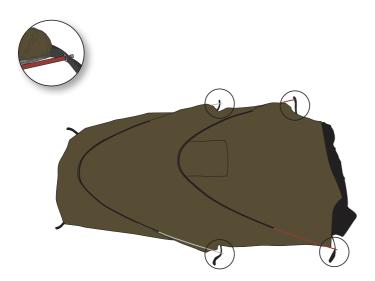


E

Secure the tent to the ground by attaching pegs into the webbing loops only at one end of the tent, starting with the end facing the wind.

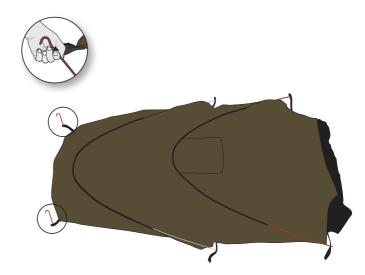

Pull the webbing loops in the end towards you and walk backwards to erect the tent. Mount the remaining pegs to the ground.

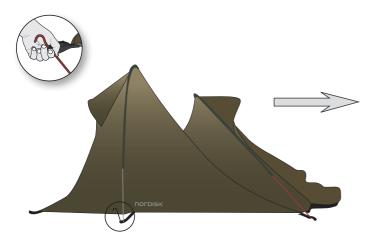

### E

Secure the tent by attaching the guy ropes to the ground. Depending on weather conditions judge how many guy ropes that are needed. In stormy weather the tent must be securely anchored Adjust webbings and guy ropes for correct tension.

Mount the inner cabin in the O-rings and hooks. When you pack the tent, you can choose to leave the inner cabin attached.





- take care of your Nordisk tent

#### **Before Trek**

- · build up the tent from home and check if everything is ok.
- $\cdot$  know the environment you'll go to (sand, hard soil, snow), and check that pegs etc. matches this
- · consider to bring along a footprint
- · check that the poles are ok, and if not; buy a new set before you go
- $\boldsymbol{\cdot}$  bring along a repair kit incl. an outer tube for poles and tape for brokens seams etc.
- · make sure the tent is clean
- $\boldsymbol{\cdot}$  ensure that zippers runs smoothly (if not, get some silicone spray)
- $\cdot$  if trekking in very wet conditions, seal the seams with a seam sealer, but check if it is SI or PU
- · do not overfill your packsack as you might need the extra space during the trip
- $\cdot\,$  optimize weight by leaving pegs, inner cabin etc. at home if it's not needed on the trip
- · compress the packsack as much as possible

#### In the Camp

- · make sure you pitch on an even surface. Some models depends on this for optimal ventilation
- · do not camp in too high grass if you want floor level ventilation
- remove sharp rocks and sticks that could harm the tent floor (i.e. use footprint)
- stretch the tent as much as possible for optimal strength and water repellency
- if wet or very windy, you need to re-adjust the tension of the guy ropes
- if very windy, use extra guy ropes and pegs for stability
- $\cdot\,$  put the packsack somewhere where you can find it again (i.e. mesh pockets inside the tent)
- avoid fire and smoke near the tent be aware of wind directions!
- · keep an eye on guy rope tension once in a while



### Living with your tent

- · keep it clean by hosing it after use, if very dirty. But don't use high pressure
- · clean it with a soft sponge
- · use no harsh chemical cleaning or machine washing
- keep it dry, and if packed down wet, remember to dry it as soon as possible
  remember that a wet tent is heavier than a dry one
- · check guy ropes and pegs once in a while, and buy new ones if damaged
- if you have damaged poles, your local Nordisk dealer can supply new ones
- be aware that long exposure of sunlight can degrade the fabric
- if you want floor in your apsis, you can purchase a tailored footprint
- love and nurse your tent. If you protect your tent, it will protect you

You can find more information on nordisk.eu



Scan it! For 360° View, Windtest, How to pitch & Fact sheet



#### **Tips & Tricks**

- 1 When you open a door, you can fold and store it, in the mesh pockets found near the door.
- 2 You can adjust the height and the ventilation, just by pulling the webbings found near the poles.
- 3 You do not have to use the inner cabin in the tent it can be pitched just as a shelter.



#### www.nordisk.eu

Nordisk Company A/S	Nordisk Freizeit GmbH	Nordisk Asia	Nordisk Japan Co. Ltd.
Papirfabrikken 74	Max-Weber-Straße 16	Unit 904, Zhong Rong Heng	2F, 2-8-11, Nishi-Azabu,
DK 8600 Silkeborg	D-25451 Quickborn	Rui West Tower, 560 Zang Yang Road	Minato-ku,
Denmark	Germany	CN-200122 Shanghai	Tokyo 106-0031,
info@nordisk.de	info@nordisk.de	China	Japan
Tel. +45 73 73 40 00	Tel. +49 (0) 4106 / 76 77-0	Tel. +86 13901625206	Tel. +81(0) 3 6885 8206